


Teleque

T101

PTT Announcer Charger

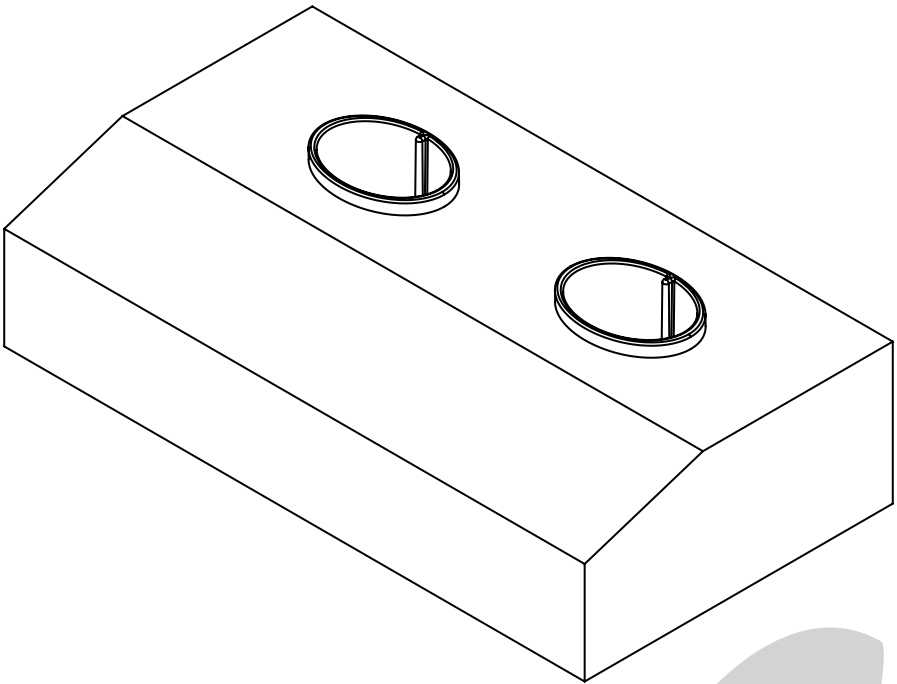

Product Manual



This product was designed and manufactured in the United Kingdom

All rights reserved
Copyright 2012 Teleque Ltd.

Information contained within this document is believed to be accurate however
Teleque Ltd. assumes no liability regarding its accuracy.

Teleque Ltd. reserves the to right to modify any product or literature without
prior notice or consent

Contents

Description.....	1
Mounting Options.....	2
Specification.....	3
PartNumbers.....	4
Warranty.....	5



1 Description

The T101 Charger allows up to 2 x T101 PTT Announcers to be charged simultaneously.

When powered through its wall mounted power supply an LED shows that the charger is on and working.

To initiate charging gently place a transmitter into one of the plastic receptacles on top of the charger, at this point the LCD on the transmitter will switch from showing its platform number to showing an animated battery symbol along with a number showing the percentage charged.




The T101 Charger is housed in a robust enclosure manufactured from stainless steel with desktop and wall mounting options.



2 Mounting options


Rear view

On the rear of the charger there are 2 x M4 bushes for wall mounting.
Note: Screws should not protrude more than 15mm into enclosure

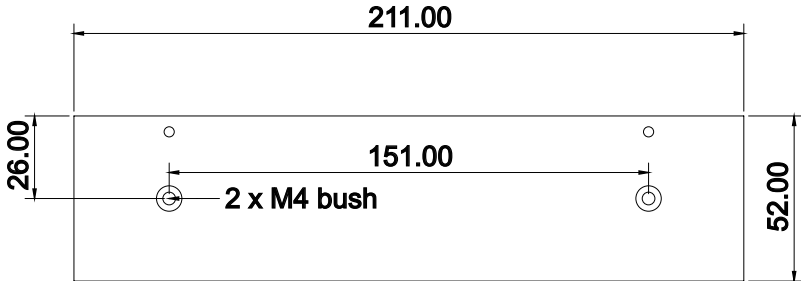

Underside view

Although the charger is supplied with rubber feet for desktop mounting, there are also 2 x M4 bushes on the underside for more secure mounting.
Note: Screws should not protrude more than 15mm into enclosure

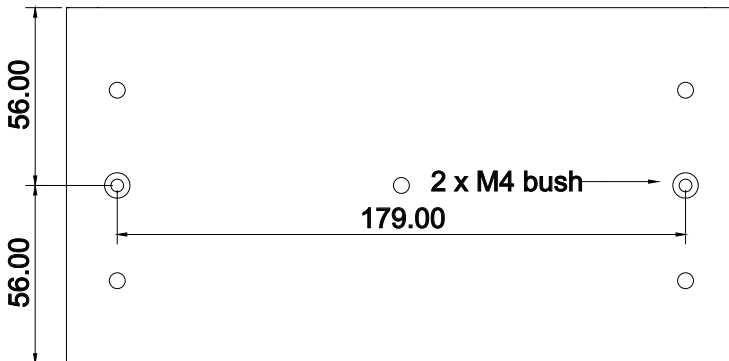

SPECIFICATION

General

DC Power source : 11-24 V DC
Current consumption : 350 mA Max.
Charger Connector : Rean RT3MP

Power Supply

Type : Wall mounted UK style
AC Input : 100-240V 50/60 Hz 0.5A
DC Output : 12V 1A
Connector : Rean RT3FC-B-W
Part number : TC101-2/110-230V/PS

Enclosure

Material : Stainless Steel
Colour : Brushed Natural

Environmental

Temperature (storage and operating) : -10 °C to +50 °C
Humidity Range (non-condensing) : 0% to 93%

Dimensions and Weight

Dimensions : Height : 51 mm
Width : 211 mm
Depth : 112 mm
Weight : 750 g



Teleque Part Numbers

Receiver unit standalone 12-28V operation	T101/70/RX
Receiver unit integrated into IP65 Enclosure	T100/IP65
Receiver antenna and bracket Assy (pair)	TDP101/70/BA
Transmitter	T101/70/TX
Standalone 2 Gang charger c/w 100-230VAC adaptor.	TC101-2
IP65 Head amp/antenna	HA101/70
Receiver 230V mains operated power supply	T101/110-230V/PS
Antenna splitter with phantom enabling	T101/2S/N
Transmitter breakaway strap	T101/BS
Gang charger 100-230VAC adaptor.	TC101-2/110-230V/PS

Standard Limited Warranty

Teleque warrants that the Equipment shall be free from defects in materials or workmanship during the Warranty Period. The Warranty Period is ONE (1) YEAR from the date of purchase by the original end-user customer.

Subject to the exclusions detailed below, if the Equipment fails to conform to this Warranty and the purchaser notifies Teleque in writing within the Warranty Period, Teleque shall, without charge for labour or parts, (in its sole discretion), repair or replace the Equipment on the terms and conditions set out below.


Exclusions

The following are excluded from warranty:

Damage caused by:

- Misuse, including (but not limited to) failure to use the Equipment for its normal purpose in accordance with Teleque's instructions on its proper use and maintenance;
- Improper operation or maintenance of the Equipment;
- Connection to improper power supply; attempted repair by anyone other than a properly Teleque authorized service agent;
- Use of the Equipment in conjunction with third party accessories, products or ancillary peripheral equipment.
- Equipment where the manufacturer's serial number has been altered, deleted, removed, or made illegible.
- Equipment which has been adjusted or adapted without Teleque's prior written consent, including (but not limited to): upgrading the Equipment beyond specifications or features described in the instruction manual, or modifications to the Equipment to conform it to national or local technical or safety standards in countries other than those for which the Equipment was specifically designed and manufactured.
- Normal wear and tear of parts, as defined by Teleque for example in Service Manuals, unless there is evidence of a manufacturing defect.
- Costs associated with de-installation, re-installation or integration into a system
- Acts of God or any reason beyond Teleque's reasonable control;

THE EXPRESS WARRANTY ABOVE SHALL BE THE FULL EXTENT OF TELEQUE'S LIABILITY. ACCORDINGLY, TELEQUE DISCLAIMS ALL OTHER LIABILITY FOR LOSS OR DAMAGE HOWSOEVER CAUSED (EXCEPT FOR DEATH OR PERSONAL INJURY RESULTING FROM PROVED NEGLIGENCE)

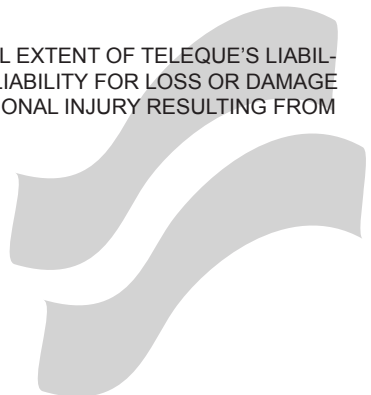



Teleque Ltd.
www.teleque.co.uk